


Self-aligning Ball Bearing (Si3N4)

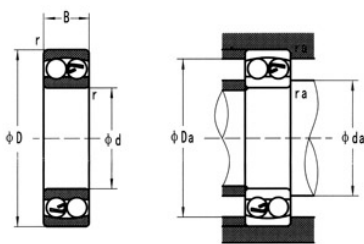

رقم توجو	(الأبعاد (مم)				(التركيب (مم)			المرجع: الوزن
	d	D	B	r(min)	da	Da	ra	(كجم)
					الحد الأدنى	ماكس	ماكس	
135	5	19	6	0.3	7	17	0.3	0.004
126	6	19	6	0.3	8	17	0.3	0.004
127	7	22	7	0.3	9	20	0.3	0.006
108	8	22	7	0.3	10	20	0.3	0.006
129	9	26	8	0.6	13	22	0.6	0.009
1200	10	30	9	0.6	14	26	0.6	0.014
2200	10	30	14	0.6	14	26	0.6	0.019
1300	10	25	11	0.6	14	31	0.6	0.024
2300	10	25	17	0.6	14	31	0.6	0.035
1201	12	32	10	0.6	16	28	0.6	0.016
2201	12	32	14	0.6	16	28	0.6	0.022
1301	12	37	12	1	17	32	1	0.027
2301	12	37	17	1	17	32	1	0.039
1202	15	35	11	0.6	19	31	0.6	0.02
2202	15	35	14	0.6	19	31	0.6	0.025
1302	15	42	13	1	20	37	1	0.039
2302	15	42	17	1	20	37	1	0.047
1203	17	40	12	0.6	21	36	0.6	0.03
2203	17	40	16	0.6	21	36	0.6	0.036

Self-aligning Ball Bearing (Si3N4)

1303	17	47	14	1	22	42	1	0.053	
2303	17	47	19	1	22	42	1	0.065	
1204	20	47	14	1	25	42	1	0.049	
2204	20	47	18	1	25	42	1	0.057	
1304	20	52	15	1.1	26.5	45.5	1	0.067	
1304	20	52	21	1.1	26.5	45.5	1	0.086	
1205	25	52	15	1	30	47	1	0.058	
2205	25	52	18	1	30	47	1	0.067	
1305	25	62	17	1.1	31.5	55.5	1	0.11	
2305	25	62	24	1.1	31.5	55.5	1	0.14	
1206	30	62	16	1	35	57	1	0.09	